

COFDM/PAL HEADEND

- ◆ The MINOX-T head-end receiver has been projected for the reception of digital terrestrial TV programs and their distribution in a centralized antenna system together with terrestrials signals.
- ◆ **User friendly:**
 - Easy to install. It can be fixed on a **standard Din bar**.
 - Easy to program through it's own I.R. programmer (enclosed). All indicators are displayed on the menu (On Screen Display)
 - Each product is supplied individually by main: 100-240 Vac. This assures the maximum reliability of the system and facilitates the eventual handlings.
- ◆ An exclusive **watch-dog** circuit assures against failure. In case of blocking, it reset automatically the equipment.
- ◆ **The Patented Audio Level Stabilizer (A.L.S.) equalizes the different audio levels present in reception of several broadcasters.**
- ◆ Full band RF modulator: **VHF + UHF**
- ◆ Automix RF Input (Out RF/In Mix)
- ◆ Powerful **Double Side Band** RF output: typ. 90 dB μ V adjustable 0/-20 dB




I.R. programmer



4 MINOX-T on standard Din bar

AUDIO LEVEL STABILIZER: HOW DOES IT WORKS:

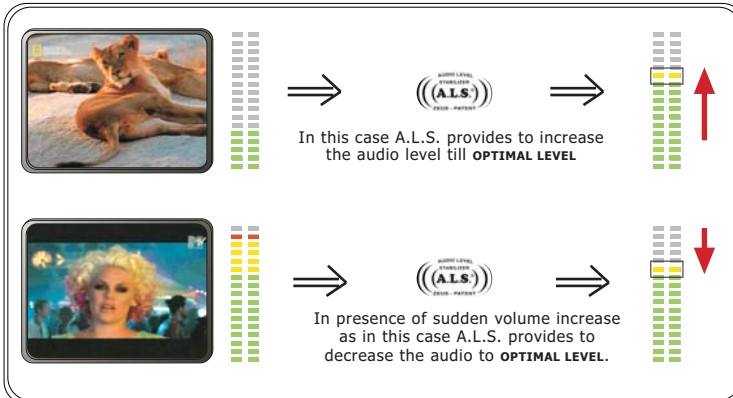

DESCRIPTION		MINOX-T
Frequency Input	MHz	48,25-226,5 (Vhf) / 470-860 (Uhf)
Symbol rate	Msp/s	2 - 45
FEC		1/2, 2/3, 5/6, 7/8, Auto
RF Output frequency	MHz	38.9 - 48/70 - 175/300 - 470/860
Output band		IF/Ib/IIIb + S11-20/UHF
RF Output level	dB μ V	Typ. 90
Video / Audio ratio	dB	Typ. 13
Connectors		Inputs (IEC) Outputs (F type)
Dimensions / Weight	mm	245 x 62 x 150 (1.600 g)
Power supply	Vac	100 - 240 (50-60 Hz)

HEADEND

